




ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1				
2				

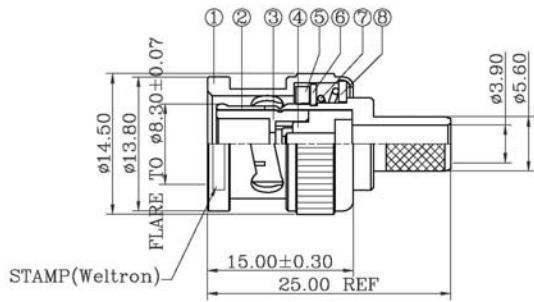


(RG59U, RG62U)




(RG59U-PLENUM)



(RG59U, RG62U)



(RG59U-PLENUM)



RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

44-290

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
4. JIS H 3250, C 2700

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
12	FERRULE	NOTE 4	1	NOTE 2
11	FERRULE	NOTE 4	1	NOTE 2
10	CONTACT PIN	NOTE 1	1	NOTE 3
9	CONTACT PIN	NOTE 1	1	NOTE 3
8	WASHER	IRON	1	NOTE 2
7	SPRING	65Mn	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2

Weltron				TITLE		DESIGNED	
				BNC CRIMP PLUG 50 OHMS		Xwj	
				(FOR RG59U, RG62U, RG59U-PLENUM CABLE)		DRAWING	
				UNLESS OTHERWISE SPECIFIED		CHECKED	
				TOLERANCES:		David	
DRAWING NO.				UNITS	MM	APPROVED	
MODEL NO.				SCALE	FIT	Andy	
PART NO.				44-290-6		EDITION	
CAD FILE				A1		PUBLISH DATE	
				2009/11/24		3RD ANGLE	