


SPECIFICATION CONTROL DRAWING

REV	DESCRIPTION	DWN	DATE	APPROVED
G	CHANGE PIN OD	KMM	1/24/94	R. RICE
H	CHG PIN CONFIG / RE-DIMENSION BODY USING FACE AS REF	KMM	8/5/96	R. RICE
J	REMOVE PART NUMBER FROM SHELL	KMM	3/6/99	R. RICE
K	CHANGE FERULE & FER STUD CONFIGURATION	CZS	2/16/00	J. D. McR.

ALL DIMENSIONS ARE REFERENCE ONLY

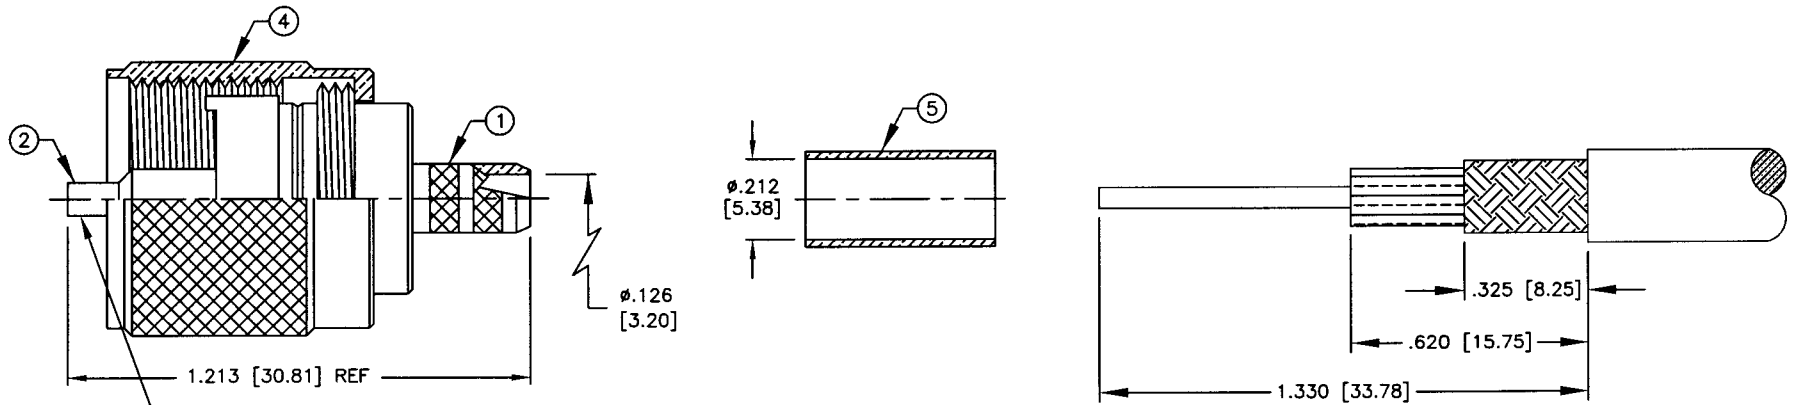

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED CRIMP DIE: .213

SPECIFICATIONS:

NON CONSTANT
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-300 MHz
 (C) FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240,
 8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268
 (C2) FOR TIMES LMR-200, ALPHA 9848 & MSI-22

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
 TOLERANCES ARE:
 DECIMALS DIAMETER

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
5	FERRULE [FER-103]	1	BRASS	NICKEL
4	SHELL	1	BRASS	NICKEL
3	DIELECTRIC	1	DAP	PANTONE 129
2	CONTACT	1	BRASS	SILVER
1	BODY	1	BRASS	NICKEL

DRAWN C. ZUNIGA	2/16/00
CHECKED <i>ADM</i>	2-17-00
ORJ DRAWN C. JONES	11/6/91
APPROVALS	DATE

UHF MALE CRIMP

SIZE A	DWG NO. 8060	REV K
SCALE: 2:1	CAD FILE D:\14ARC	SHEET 1 OF 1