



REV.	DESCRIPTION	ENG.	APPROVAL

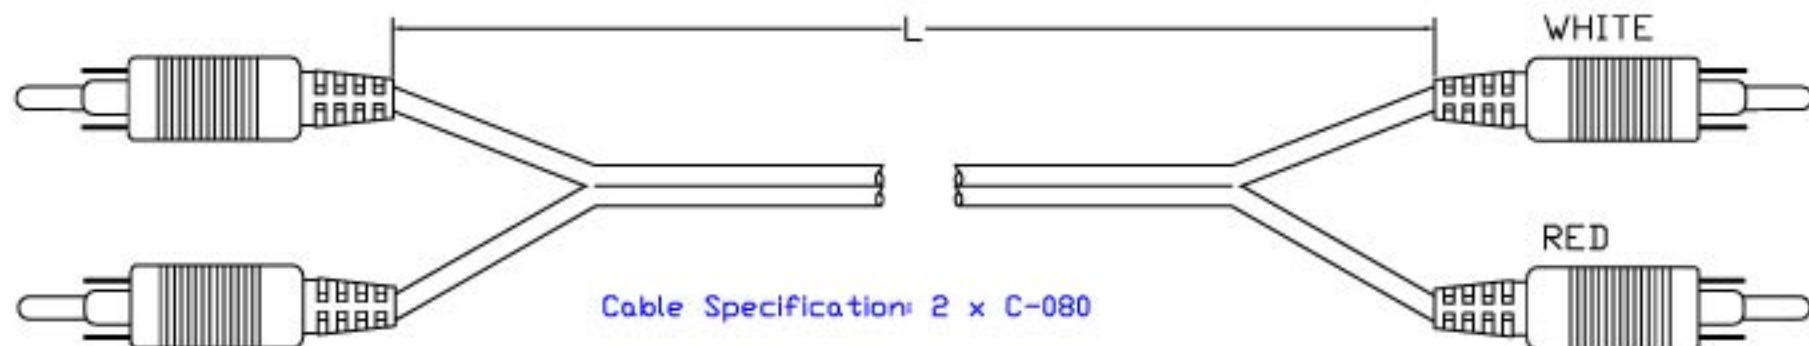


ITEM	L	Jacket Color	Connector Plating
		Black	Nickel
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel
		Black	Gold
		Black	Nickel

RCA-Plug

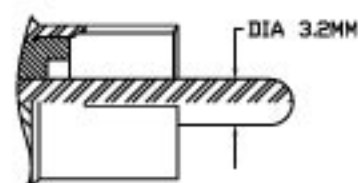

Circuit Diagram

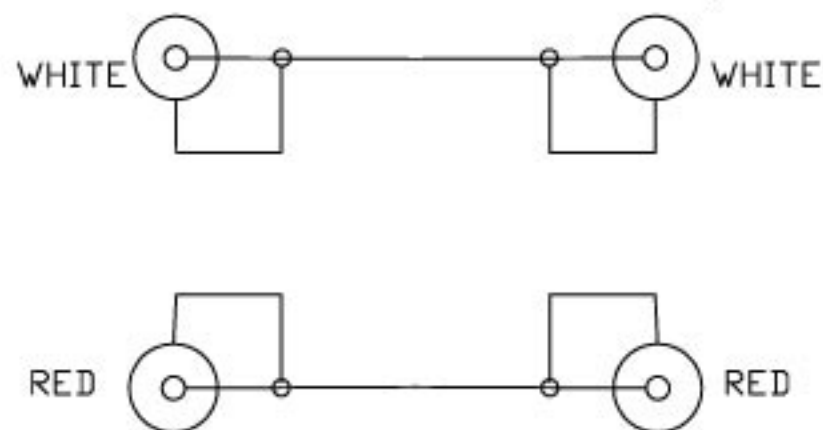



<small>THIS DRAWING AND THE SPECIFICATIONS ARE THE PROPERTY OF LLC AND SHALL NOT BE COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN PERMISSION FROM</small>	SKU NO.		SCALE
	TITLE 2 RCA PLUGS TO 2 RCA PLUGS		
<small>DIMENSIONS</small> 0 TO 25MM 25 TO 100MM 100 TO 200MM 200MM AND UP	<small>TOLERANCE</small> +/- 0.12MM +/- 0.25MM +/- 0.50MM +/- 0.25MM	DRAWING NO.	
<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND ANGULAR TOLERANCE IS +/- 1°</small>	DRN BY L.WEEKS DATE: 11/18/03	CHK BY: Q.WENG DATE: 11/18/03	APPR. BY: Q.WENG DATE: 11/18/03
	FILE NAME	SHEET 1/1	

REV.	DESCRIPTION	ENG.	APPROVAL

Cable Specification: Code C-080

- 2.8mm OD Spiral-Shielded Audio Cable
- AWG26 10x0.12mm Bare Copper Center Conductor
- 28 x 0.12mm Bare Copper Spiral-Shield
- 1.1mm OD PVC Insulator
- 2.8mm OD Black Satin Rubberized Flex PVC Jacket

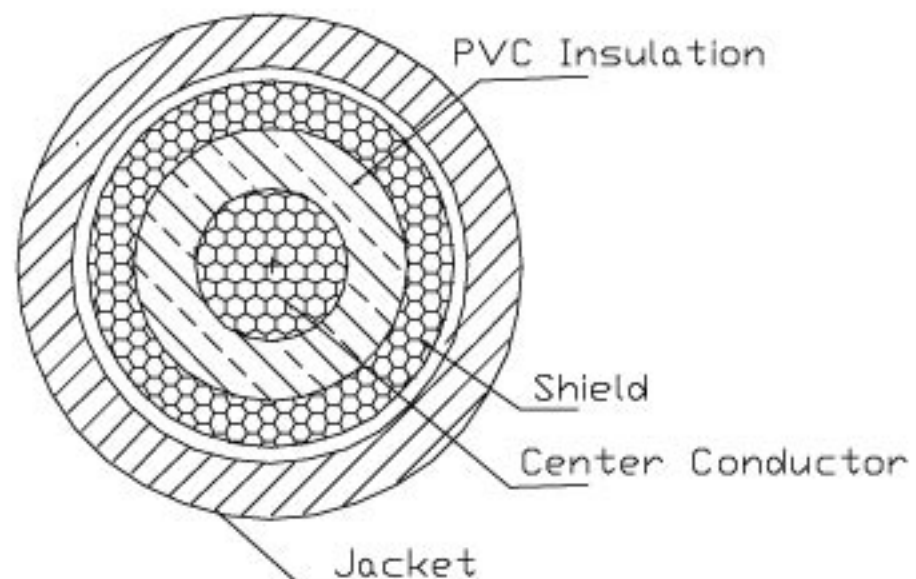

<small>THIS DRAWING AND THE SPECIFICATIONS ARE THE PROPERTY OF LLC AND SHALL NOT BE COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN PERMISSION FROM</small>	SKU NO.		SCALE
	TITLE 2.8mm AUDIO CABLE		mm
<small>DIMENSIONS TOLERANCES 0 TO 25MM +/-0.10MM 25 TO 100MM +/-0.20MM 100 TO 200MM +/-0.30MM 200MM AND UP +/-0.50MM</small>	DRAWING NO.		
<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND ANGULAR TOLERANCE IS +/- 1°</small>	DRN BY: CURUMILLA DATE: 1/19/99	CHK BY: WENG DATE: 1/19/99	APPR. BY: SOFFER DATE:
	FILE NAME		SHEET 1/1