

Specification Note: Cat6 cable is certified to 250MHz. Testing above that frequency allows for the use of this cable with ATM cabling system.

Notes:

1. P1,P2: RJ45(long) connector.

TABLE NOTES:


TABLE 1: 24AWG(7/0.209)M4P+BARE INSULATION: HD-PE DD=ø1.0±0.02MM

COLOR: Blue&White/Blue, Orange&White/Orange, Green&White/Green, Brown&White/Brown.

JACKET: 80°C PVC DD=ø6.2±0.3MM MARKING: 250MHZ UTP 24AWG 4PAIR SJ2835 E175723

AWM 60°C 30V LL212720 CSA AWM I A 80°C 30V FT1 ETL VERIFIED TO TIA/EIA 568B CAT6

WIRE COLOR	RJ45 (P1) PLUG	RJ45 (P2) PLUG	WIRE COLOR
White/Green	1	1	White/Green
Green	2	2	Green
White/Orange	3	3	White/Orange
Blue	4	4	Blue
White/Blue	5	5	White/Blue
Orange	6	6	Orange
White/Brown	7	7	White/Brown
Brown	8	8	Brown

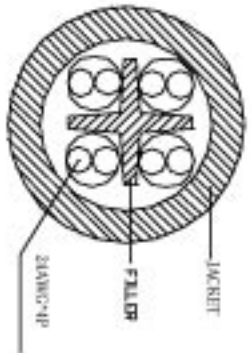

Change Notes:



Winston International, LTD.
200 Hillsporo Street
Oxford, NC 27565
1.919.693.1561
www.winstonelec.com

PRODUCT	CUSTOMER	DRAWN
CAT6 Patch cable (M)	Z.X.Q	Eric Lee
CUS.NO	VERSION	CHECKED
	ONE	Jackson Chang
DR.NO	DRAWN DATE	APPROVED
	DEC.05.2002	Eric Lee

