


⚠ NOTE: All relevant materials are complied with RoHS directive .

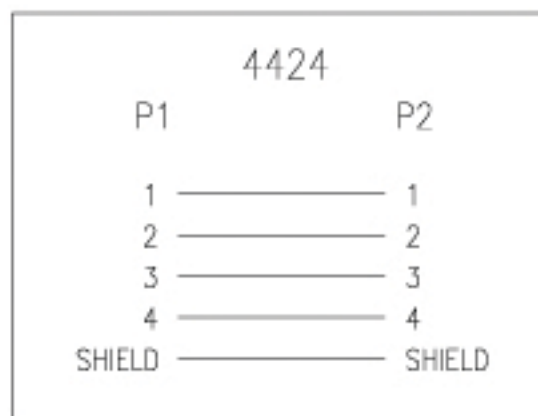

3	UL1007 30AWG INSULATION WIRE, LENGTH 28mm, DRAWING No.EH003001C-023	5	M304
	BLACK HEAT SHRINK TUBE $\phi$ 1.0*8mm	4	M743
	COPPER FOIL 25*40mm	1	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
2	MINI USB 4P MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR, MISTUMI TYPE	1	M108
1	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATION	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		<h1>Weltron</h1>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm
CHECKED	TIAN		
DRAWING	XIE		
DATE	28/NOV/07	ITEM NO.	90-USBAFM5M
		UNIT:mm	