


NOTE: All relevant materials are complied with RoHS directive .

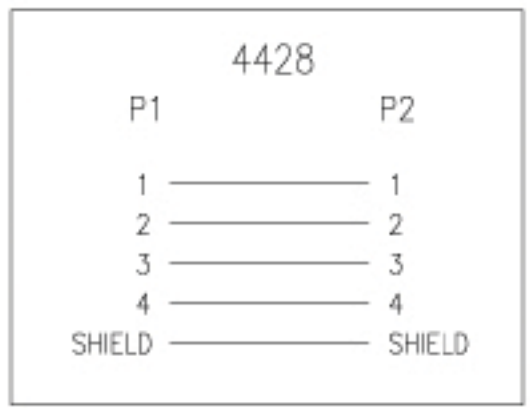

3	UL1007 30AWG INSULATION WIRE, LENGTH 25mm, DRAWING No.EH003001C-023	5	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*8mm	5	M519
	COPPER FOIL 20*50mm	1	M379
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
2	MINI USB 4P MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR, MISTUMI TYPE	1	M108
1	USB B FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATION	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		<h1>Weltron</h1>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	TIAN		
DRAWING	SONG		
DATE	23/JUN/05		
	ITEM NO.	90-USBBFM4M	UNIT:mm

CHECKED

