


Standard Lengths: (Other lengths available upon request)

- 01: 304.8 mm ± 12.7 mm
- 02: 609.6 mm ± 12.7 mm
- 03: 914.4 mm ± 12.7 mm
- 04: 1219.2 mm ± 25.4 mm
- 05: 1524.0 mm ± 25.4 mm
- 06: 1828.8 mm ± 25.4 mm
- 07: 2133.6 mm ± 25.4 mm
- 10: 3048.0 mm ± 50.8 mm
- 14: 4267.2 mm ± 50.8 mm
- 15: 4572.0 mm ± 50.8 mm
- 20: 6096.0 mm ± 50.8 mm
- 25: 7620.0 mm ± 50.8 mm
- 35: 10668.0 mm ± 76.2 mm
- 50: 15240.0 mm ± 76.2 mm
- 75: 22860.0 mm ± 76.2 mm
- 100: 30480.0 mm ± 101.6 mm

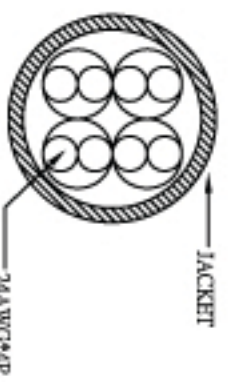

NOTES:  
 CABLE: 24AWG(7/0.196±0.01mm)\*4P  
 INSULATION: HD-PE OD=Ø1.0±0.05MM  
 COLOR: BLUE & WHITE/BUE, ORANGE & WHITE/ORANGE, GREEN & WHITE/GREEN, BROWN & WHITE/BROWN  
 JACKET: 80°C PVC OD=Ø5.3±0.3MM  
 JACKET COLOR(Pantone #): BLUE (301U), BLACK (Hexachrome Black C), GRAY (403C), GREEN (3425C), ORANGE (159C), PURPLE (520C), RED (199C), WHITE (White), YELLOW (131C), DARK GRAY (Cool Gray 11C), Pink (7434U)  
 MARKING\*: ROHS COMPLIANT ENHANCED 350MHz PATCH CABLE 24AWG 4PR E175724 TYPE CM 60C 30V L212720 CSA AWM 1A 80C 30V FT1 UL Verified to ISO/IEC 11801 AND TIA/EIA 568B-2 CAT 5E at 100 meters ITL. Verified to meet ISO/IEC 11801 AND TIA/EIA 568B-2 CAT 5E at 100 meters

\*UL, ETL, and CSA Markings may vary according to the approvals of the bulk wire manufacturer  
 \*350 MHz markings refer to testing in accordance to TIA 568B.2 Category 5e and Swept out to 350 MHz by ETL or UL

Over color code	PIN OUTS
RJ45 PLUG	WIRE COLOR RJ45 PLUG
1	WHITE/ORANGE 3
2	ORANGE 6
3	WHITE/GREEN 1
4	BLUE 7
5	WHITE/BLUE 8
6	GREEN 2
7	WHITE / BROWN 4
8	BROWN 5

ITEM NO	PART NAMES	QTY
3	MOLDED BY 65P PVC, PVC COLOR: to match the cable color	2PCS
2	CONNECTOR: RJ45 Short Plug	2PCS
1	CABLE: 24AWG*4P+1, OD: 5.5mm, JACKET COLOR: as listed above	1PCS

THIS PRODUCT IS ROHS COMPLIANT

PRODUCT	RJ45 PLUG TO RJ45 PLUG	CUSTOMER	DRAWN	J.C.B.	THREE ANGLE PROJECTION
CUS,ND	CAT5e CROSS OVER PATCH CABLE	VERSION	CHECKED	H.J.M	
DR,ND	90-C5EB-xxYL	DRAWN DATE	APPROVERD		

Winston International