

NOTES:

1. CABLE:

[[28AWG(7/0.127)x1P+DRAIN(7/0.127)+AL/MY+MY]x4C+28AWG(7/0.127)x1P+28AWG(7/0.127)x5C+AL/MY+AL+85%(24/8/0.12)BRAID]TIN

INSULATION(A): Foam-PE, OD=ø0.95±0.05mm, UL-1598
 COLOR: GREEN, WHITE, BROWN, WHITE, RED, WHITE, BLUE, WHITE

INSULATION(B): HD-PE, OD=ø0.70±0.05mm, UL1598
 COLOR: ORANGE, YELLOW

INSULATION(C): HD-PE, OD=ø0.70±0.05mm, UL1598
 COLOR: WHITE, RED, PURPLE, YELLOW, GREEN

JACKET: PVC, OD=ø7.3±0.15mm, UL20276, COLOR: PANTONE 432C

PRINT: " 20276 (UL File Number) AWM 80°C 30V VW-1"

2. MOLD


INNER MOLD USING PE, OUTER MOLD USING PVC -- 45P, COLOR: 432C

3. ELECTRICAL TEST:

- 1) MINIMUM CURRENT RATING: DC 0.5A
- 2) WITHSTANDING VOLTAGE: DC 300VDC
- 3) INSULATION RESISTANCE: 50Mohm
- 4) CONDUCTIVE RESISTANCE: 20ohm

4. LENGTH OF FINISHED PRODUCTS:


- 1) 914±25.4
- 2) 1829±25.4
- 3) 3658±50.8

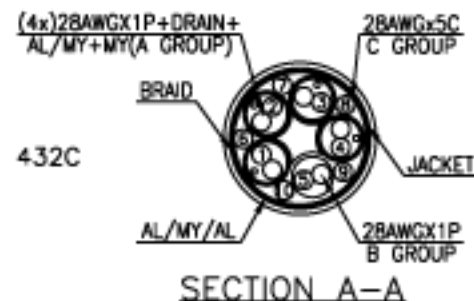

PIN ASSIGNMENT			
HDMI MALE	HDMI MALE	COLOR	GROUP
3	3	Green	Pair 1 (A)
1	1	White	
2	2	Drain	Pair 1 Shield
6	6	Blue	Pair 2 (A)
4	4	White	
5	5	Drain	Pair 2 Shield
9	9	Brown	Pair 3 (A)
7	7	White	
8	8	Drain	Pair 3 Shield
12	12	White	Pair 4 (A)
10	10	Red	
11	11	Drain	Pair 4 Shield
13	13	Yellow	Discrete Wire
14	NC	Green	Discrete Wire
18	18	White	Discrete Wire
17	17	Red	Discrete Wire
15	15	Orange	Pair 5 (B)
16	16	Yellow	
19	19	Purple	Discrete Wire
SHELL	SHELL	Braid	Cable Shield

	PVC MOLDED 432C IN COLOR	
	HDMI A MALE SOLDER TYPE CONTACT PLATED: GOLD	2PCS
	HDMI CABLE UL20276 28AWG/4P+28AWG/1P+28AWG/5C+AL/MY+AL	1PCS
NO.	DESCRIPTION	QTY

PRODUCT	HDMI A-A Cable	CUSTOMER		DRAWN		W.Q	
CUS,NO		VERSION		CHECKED			
DR,NO		DRAWN DATE	JUNE.14.2006	APPROVERD			



THREE ANGLE PROJECTION