
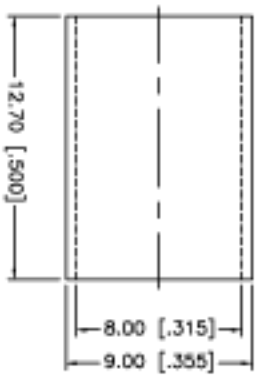
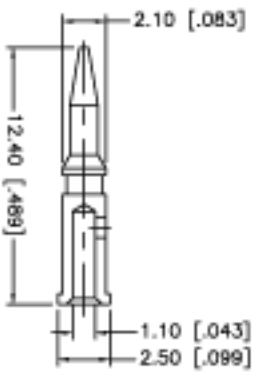
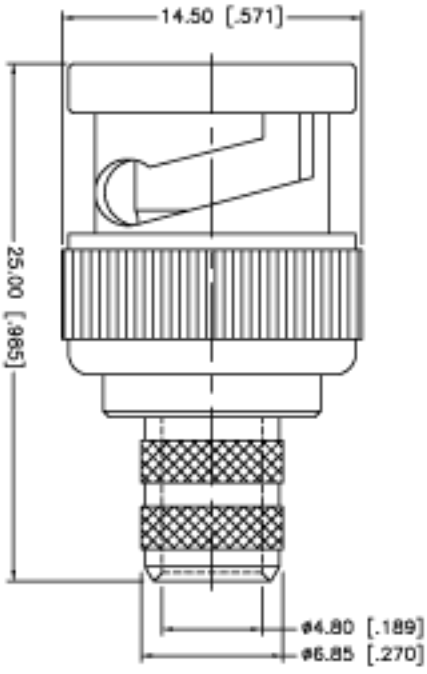


REV.	DATE	DESCRIPTION
A	01/10/04	UPDATE DRAWING FORMAT
B	11/16/05	ADD CRIMP NOTES

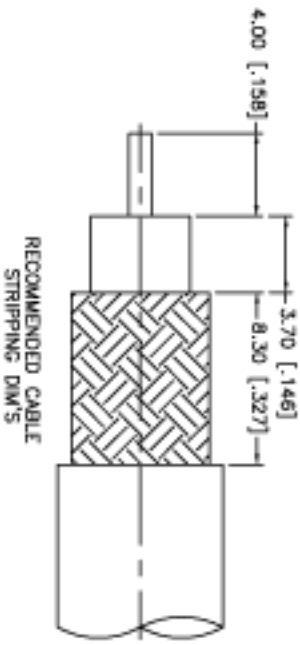

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .320*
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068*

Winston International

BNC CRIMP PLUG RG-6/U CABLE - 75 ohms

44-290-6Q

DESCRIPTION	MATERIAL	FINISH	QTY
1 BODY	BRASS	NICKEL	1
2 INSULATOR	DELFIN	NATURAL	1
3 CONTACT PIN	BRASS	GOLD	1
4 FERRULE	COPPER	NICKEL	1
5			
6			
7			
8			

APPROVALS	DATE
G.R.S.	11/16/05
CHECKED	
ISSUED	
SHEET	1 OF 1

REV. B	SIZE A	SCALE NA
112508.DWG		
C:/112/112508.DWG		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (INCHES IN PARENTHESES) AND TOLERANCES ARE AS SHOWN FOR UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 30mm ± 0.20mm
 30 - 120mm ± 0.40mm
 120 - 150mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .005 - .315 ± 0.0075"
 .315 - 1.180 ± 0.015"
 1.180 - 4.774 ± 0.020"

DO NOT SCALE DRAWINGS